


Weld Quality Starts in the Arc

| Low Profile 'F' Head |

The Low Profile 'F' Head is a "cut-down" version of the standard 'F' weld head designed specifically for low radial clearance applications. As the operation function switches have been removed from the head in order to reduce its radial envelope, the Low Profile 'F' head is operated from its accompanying operator's pendant. Like the standard 'F' head, the Low Profile 'F' Head mounts on our circular track and includes an 'A' front-end as standard equipment. An optional video front-end is also available and includes a single light source, lead and lag cameras and motorized torch tilt.

Travel Speed:	0 - 20 IPM	Manual Torch Positioning:	Up/Down +/- 1-1/8"
Oscillatin Travel:	2.00"	Welding Torch Rating:	300 AMPS
Arc Voltage Control Stroke:	1.50"	Wire Size (maximum):	.045" diameter
Wire Feed Rate:	0 - 99 IPM	Spool Weight/Size:	2 lbs., 4", std
Wire Positioning:	Up/Down +/- 3/8" In/Out +/- 15°	Head Weight:	20 lbs. (less cable)

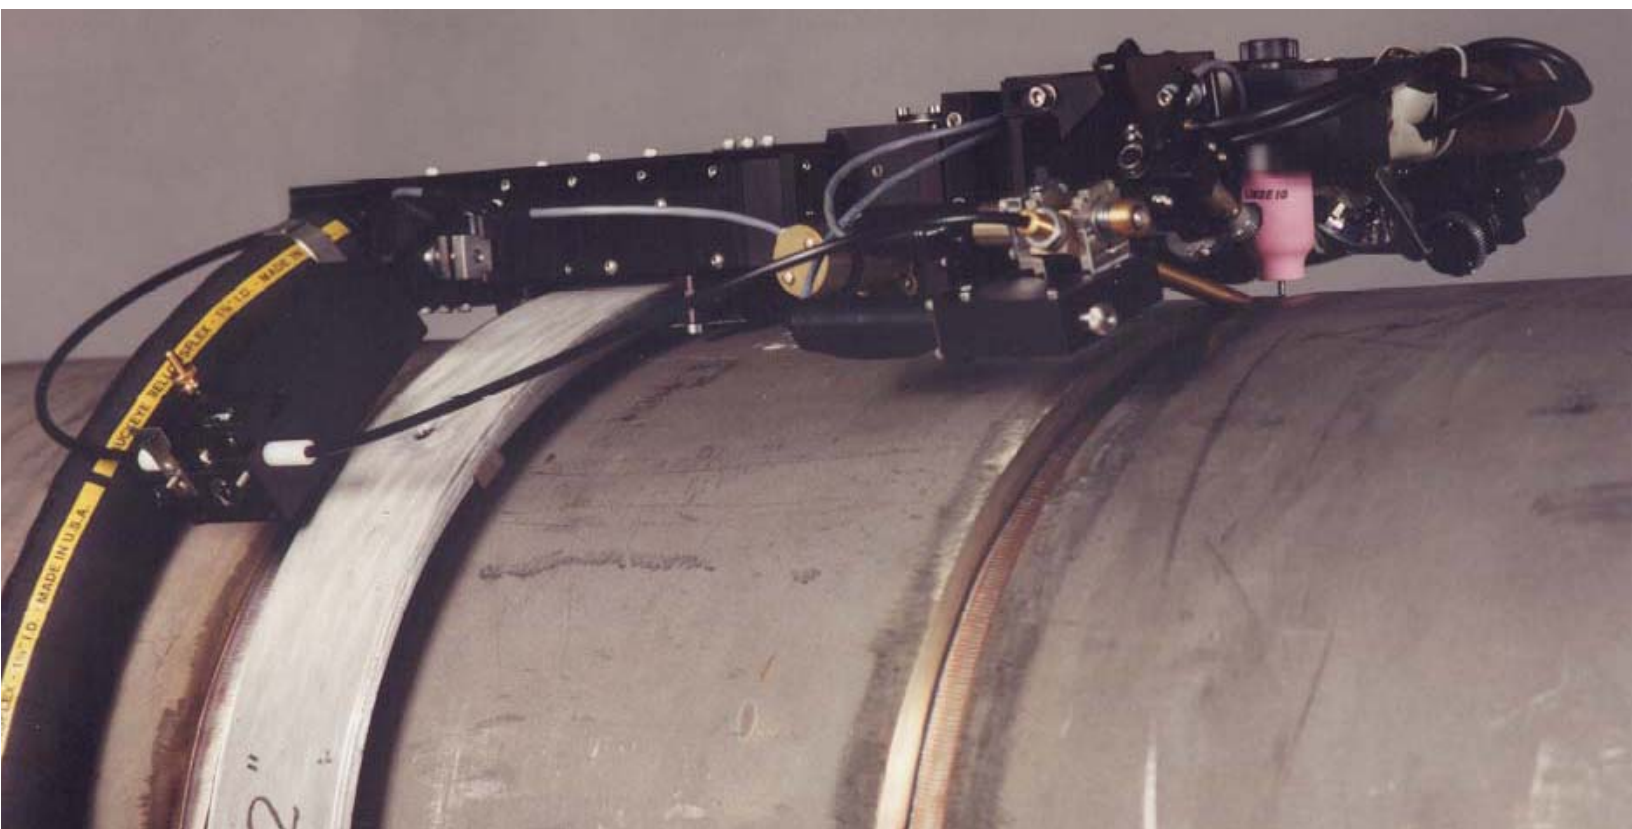

USA | tel: 1-704-892-8872 | dimmktg@dimetrics.com
INTERNATIONAL | tel: 1-905-689-0734 | liburdi@liburdi.com
EUROPE | tel: +31-6-2036-1018 | liburdieurope@liburdi.com
www.liburdi.com